

Steam Boilers


FSB18C, FSB24C



Features and benefits

- Range of capacity from 8-25kg and 8-32kg steam/hour
- Free standing package boiler
- Standard with integral water feed pump
- Water feed/condensate tanks for energy efficiency/simple installation
- Variable heating control for energy saving when full capacity is not required
- Stainless steel tank for condensate recovery and energy efficiency
- Moving parts reduced to a minimum for low maintenance cost
- Economizer to reduce water and energy consumption (option)

Electrical connections			FSB18C	FSB24C
Voltage	400V 3N AC 50Hz	kW(A)	19(32)	25(40)
Boiler heating				
Steam output		kg/h	25	32
Rating		kW	18	24
Steam outlet, drain, water connections				
Steam outlet		DN	15	15
Max. steam pressure		kPa	500	500
Water supply		mm	16	16
Condensate inlet		DN	12	12
Boiler drain		DN	15	15
Shipping data				
Weight		net, kg	110	110
		crated, kg	125	125
Dimensions in mm				
A	Width		460	460
B	Depth		810	810
C	Height		1178	1178
D			767	767
E			701	701
F			451	451
G			94	94
H			127	127
1	Control panel	4	Condensate inlet	
2	Electrical connection	5	Water supply	
3	Steam outlet	6	Boiler drain	

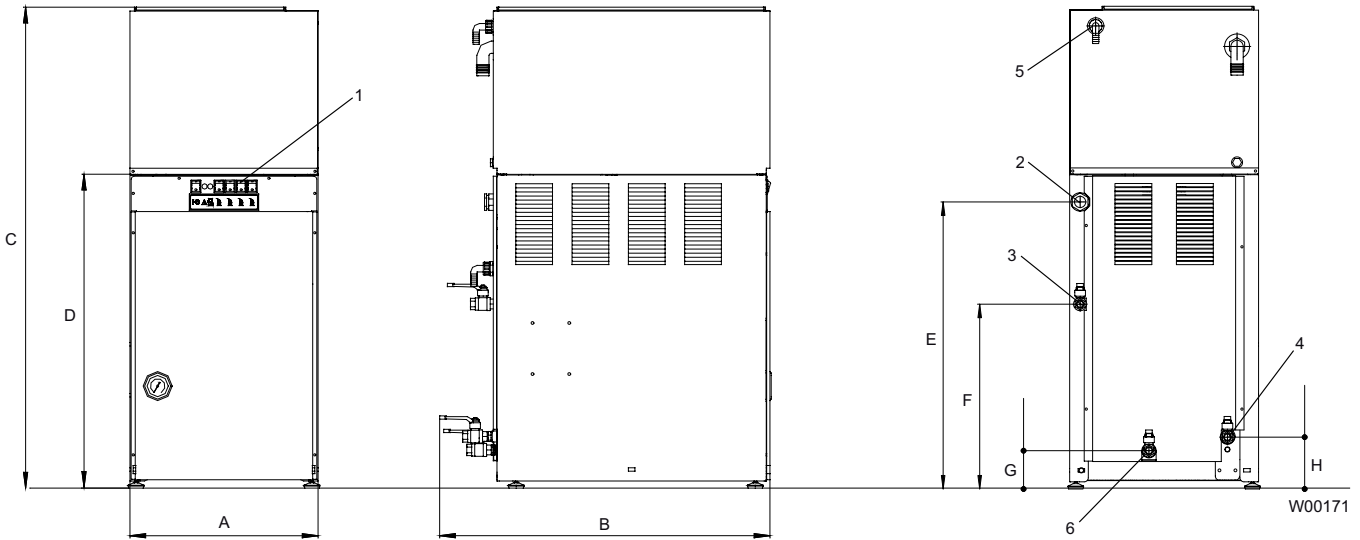

Thinking of you
Electrolux

www.electrolux.com/laundrysystems

Share more of our thinking at www.electrolux.com