

# Tumble dryer

## TD6-7



### Dryer featuring exceptional savings and effortless use



#### Priority on people

Certified ergonomic design with a human-centered approach for an outstanding user experience

- Lint filter  
The horizontal filter drawer is positioned for easy access and cleaning without the need to bend down when stacked on a WH6-6
- The display can easily be moved to the bottom of the tumble dryer for a better position when stacked



#### Long-term savings

Innovative features to save money and time, and embrace a sustainable lifestyle



#### Pure control

Monitor your equipment and performance from anywhere, allowing to take action and to improve your business with OnE Laundry - the personal assistant for hygiene validation management, process management and revenue management



#### Outstanding productivity

Dry more laundry in less time: a game-changing improvement

- Reversing drum  
Minimizes wrinkles and drying time to get an effective and even drying performance

#### Main options and accessories

- Insulated glass door keeps the door cool on the outside and heat on the inside, so the room temperature is not affected
- Lagoon Advanced Care
- Door, front and side panels are available in stainless steel
- Connectable to booking-/payment system or coin meter
- Stacking kit
- Moisture Balance  
Helps to stop the drying process at the right time to save on energy costs



Images shown are a representation of the product only and variations may occur.

Main specifications			TD6-7			
Rated capacity, filling factor 1:18	kg/lb		7.5/16.5			
filling factor 1:22	kg/lb		6.1/13.4			
Drum volume	litre		135			
Drum diameter	mm		575			
Heating, electric	kW		3.0/4.5/6.0			
gas	BTU/h (kW)		23900 (7.0)			
<b>Consumption data*</b>			EI 3.0 kW	EI 4.5 kW	EI 6.0 kW	Gas
Total time full load	min		57	40	30	30
Energy consumption full load	kWh		3.11	3.11	3.04	3.67
Evaporation	g/min		54	78	104	101
Energy kWh/litre water evaporated	kWh/l		1.01	1.01	0.99	1.20

\* At rated capacity 1:22, 100% cotton load at 50% initial moisture dried to 0%.

Produced according to ISO 9001 and ISO 14001.

Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.


Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-240V 1 ~	50/60	3.0/4.5/6.0	3.3/4.8/6.3	16/25/35
	220-230V 3 ~	50/60	4.5/6.0	4.8/6.3	16/20
	240V 3 ~	50/60	4.5/6.0	4.8/6.3	16/16
	380-400V 3 ~	50/60	4.5/6.0	4.8/6.3	10/16
	415/440/480V 3 ~60		4.5/6.0	4.8/6.3	10/10
Gas heated	220-480V 1/3 ~	50/60	*	0.3	10

\* Total power and recommended fuse does not depend on the heating power in those cases.


Gas and air connections			TD6-7
Gas		ISO 7/1-R	1/2"
Gas pressure			
	Natural gas	Pa	2000
		mbar	20
	Propane	Pa	2800-5000
		mbar	28-50
Air outlet		ø mm	125
Evacuated air,	el 3.0/4.5 kW	m³/h	150
	6.0 kW	m³/h	220
	gas 7.0 kW		280
Pressure drop	el 3.0/4.5 kW	Max. Pa	350
	6.0 kW	Max. Pa	270
	gas 7.0 kW		230
Sound levels			
Sound power/pressure level at drying*			
		dB(A)	63/48
Heat emission			
% of installed power, max			15
Shipping data**			
Weight		net, kg	109
Shipping volume		crated, m³	0.81
Dimensions in mm			
A	Width		600
B(a)	Depth, el		845
B(b)	Depth, gas		877
C	Height		1050
D			582
E			384
F			296
G			79
H			50
I			98
J			118
K			90
L			522
1	Operating panel		
2	Door opening ø 392 mm		
3	Electrical connection		
4	Exhaust connection		
5	Gas connection		

\* Sound power levels measured according to ISO 60704.


\*\* Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

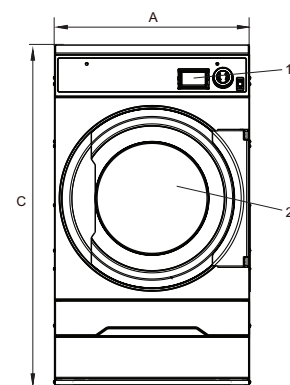

Front

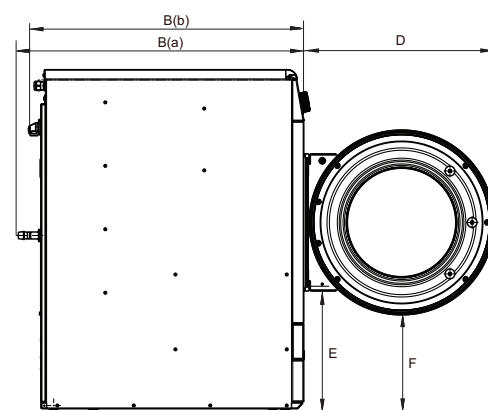

Left side

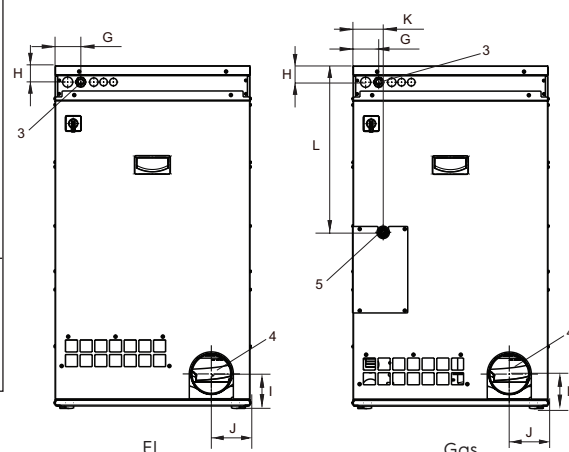

Rear side